




Diffusive linear profile for wall or ceiling mounted indoor installation ideal for the illumination of common spaces, circulation areas, shops shop-windows, museums, large areas, corridors, entrances, living rooms kitchens, bedrooms.

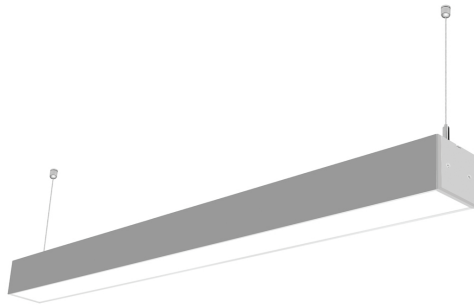

## General Data

Item No.	APL174I
Power	40 W
LED Type	Epistar LED
Luminous flux	95 lm/w
CCT	2700~6500K
CRI	80+
Beam angle	120°
Dimension (mm)	75x75x1200 (Custom Lengths available)
Cut out (mm)	/
Life Time:	50,000 Hrs
Adjustable	No
Working Temp	-20° ~ +50°
Surge protection	Yes

## Construction Data

IP rating	IP40
Finishing	<input type="radio"/> White <input checked="" type="radio"/> Black <input type="radio"/> Aluminum
Housing	Aluminum
Diffuser	PC

## Accessories

Connectors (T - L - +)/ suspended ropes / mounting clips

## OPTIONS

Dimmable	YES (0-10V dimming/DALi dimming/DALI push dimming)
Emergency	YES

## Electrical Data

Input voltage	AC100~245V
Insulation Class	I
Cable	Open wires
Driver	Integrated high voltage driver

