




Inground light

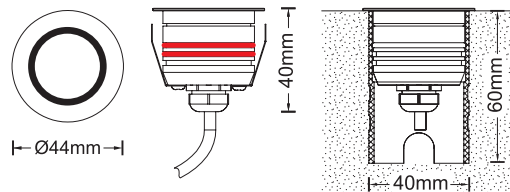

Light Distribution Curve (3000K, 120°)

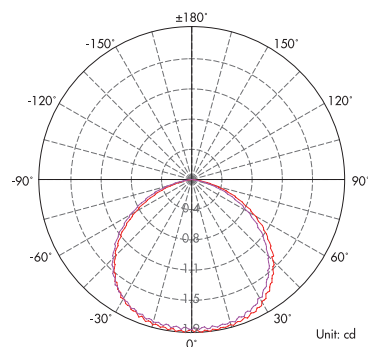

Lux distance Curve (3000K, 120°)

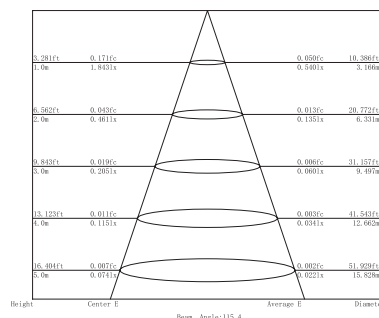

Illumination Picture (120°)



The icon / logo of the trim can be customized!

Parameter

General Data

Item No.	IGD01700
Power	2 Watts +10%
LED type	1PC 2W OSRAM LED
Luminous flux	12lm +10%
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beam angle	120°
Dimension	Ø44 x 40 (mm) Diameter x length
Cut out	40 mm
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS

Electrical Data

Input voltage	DC24V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2 x 1mm square
Driver	Low voltage input constant current output

Construction Data

IP rating	IP67 Waterproof
IK rating	IK07
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing, silver color
Trim	Stainless steel 316 in white color or original 316 color The icon / logo of the trim can be customized
Glass	/
Loading capacity	500 kgs
Cable Gland	PG gland
Gasket	O-ring PMQ silicone seal

Accessories

Mounting Sleeve	With mounting sleeve PVC as options used as inground light
Clip	With 2 clips as deck light or ceiling light