




Inground light

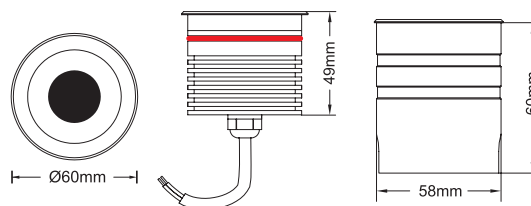


Light Distribution Curve (3000K,360°)

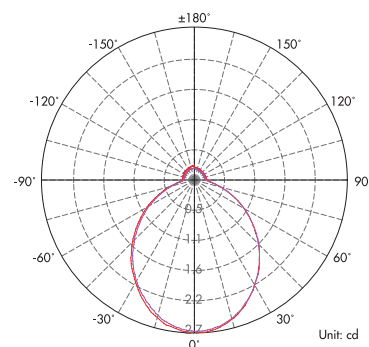

Lux distance Curve (3000K,360°)

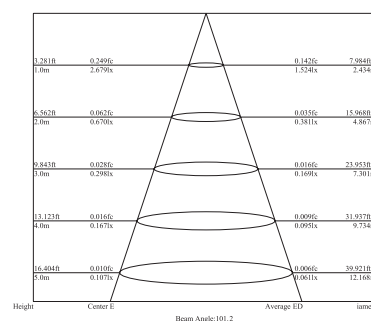

Illumination Picture (360°)

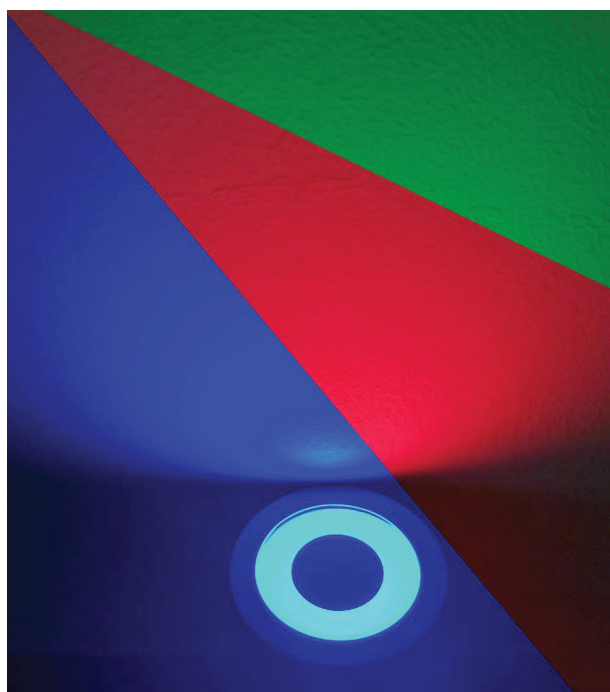

Parameter

General Data	
Item No.	IGD01760
Power	3 Watts
LED type	6PCS 5050 3in1 RGB SMD LED
Luminous flux	90 lm (All LEDs on)
CCT	RGB
CRI	70+
Beam angle	120°
Dimension	60x49 (mm) Diameter x Height
Cut out	58 mm
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V /DC24V
Insulation class	Class III
Cable	1PC rubber cable 0.3M H05RN-F 4x0.5mm square
Driver	Low voltage constant current output, excluding the transformer
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Solid Passivated (Anodizing) Aluminum CNC machined
Glass	Step tempered Glass. T=5.5mm.
Loading capacity	320 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Anti-corrosion PVC. Grey