


The six kinds of covers in the next three pages for this lamp body

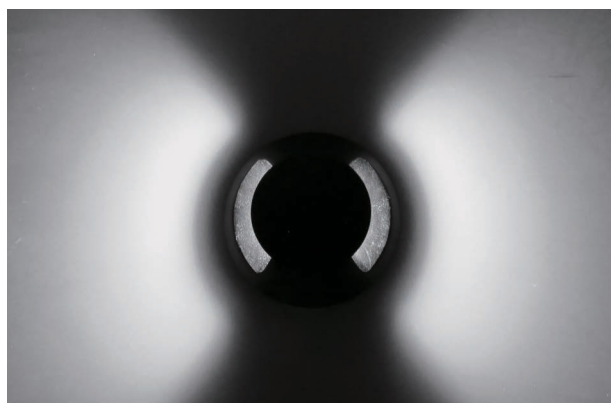

Parameter

General Data	
Item No.	IGD0191O/IGD0443O(RGB)/IGD0446O(RGBW)
Power	3 Watts
LED type	3PCS 1W OSRAM LED / 3PCS 5050RGB LED / 3PCS RGBW6000K LED
Luminous flux	A cover:25lm / B cover:10lm / C1 cover:10lm / C2 cover:21lm / C3 cover:22lm / C4 cover: 24lm
CCT	2700K, 3000K, 4000K, 6000K, R,G,B or RGB or RGBW6000K
CRI	80+
Beam angle	120°
Dimension	56.3x 6 (mm) Diameter x Height
Cut out	/
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V for single color, DC12V for RGB
Insulation class	Class III
Cable	1PC cable 0.3M 2 or 4 x 0.35 mm square
Driver	Low voltage constant current output, excluding the transformer
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK10 with cover
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing
Trim	Six kinds of covers as options (in the next three pages)
Glass	Without glass, but with glue
Loading capacity	320 kgs
Cable Gland	Aluminium part
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Without sleeve, but with screws for easy surface mounting.