




Inground light

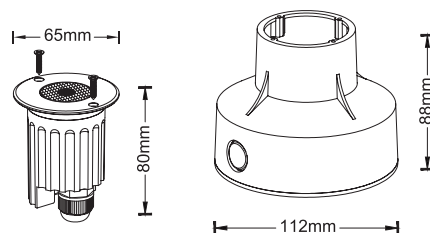

Light Distribution Curve (3000K, 10°)

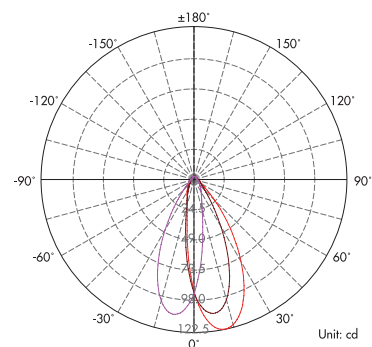

Lux distance Curve (3000K, 10°)

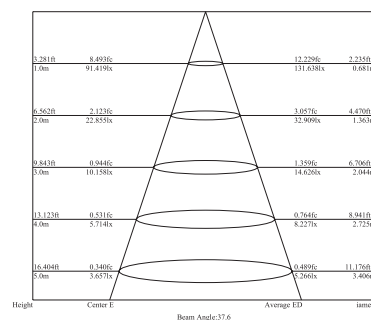

Parameter

General Data	
Item No.	IGD02570
Power	5 Watts
LED type	1 PCSVW CREE XPG LED
Luminous flux	350~400 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	Asymmetric lens with 15°+15°, 15°+25°, 15°+30°, 15°+45°, 15°+60° (tilt +pan) or general lens 6°, 8°, 10°, 17°, 23°, 28°, 43°, 58°
Dimension	Ø65x80 (mm) Diameter x length
Cut out	112 mm
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1 mm square
Driver	Low voltage constant current output, excluding the transformer
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Stainless steel 316
Glass	Step tempered Glass. T=6mm.
Loading capacity	320 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting sleeve	Anti-corrosion black PVC

Illumination Picture (10°)

