




Inground light

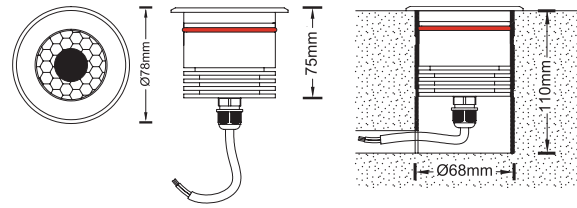

Light Distribution Curve (3000K, 1x40°)

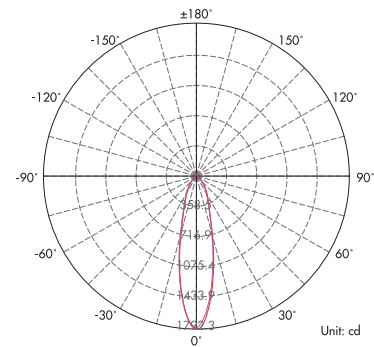

Lux distance Curve (3000K, 1x40°)

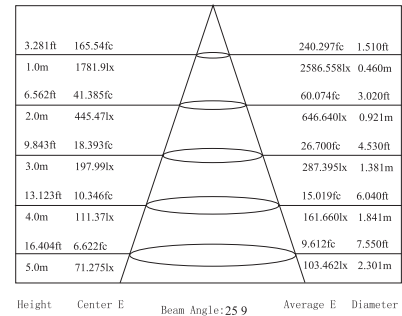

Parameter

General Data	
Item No.	IGD02630 (Half glass black)
Power	9 Watts
LED type	1 PC 9W COB LED
Luminous flux	390-420 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	10°, 23°, 38°
Dimension	Ø78x75 (mm) Diameter x length
Cut out	66 mm
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V as standard, (AC100~245V as options)
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1mm square
Driver	Low voltage constant current output, excluding the transformer
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK08
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Stainless steel 316
Glass	Step tempered Glass. T=8mm.
Loading capacity	2000 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting sleeve	Passivated (Anodizing) Aluminum CNC machined. Dark grey

Illumination Picture (1x40°)

