




Inground light

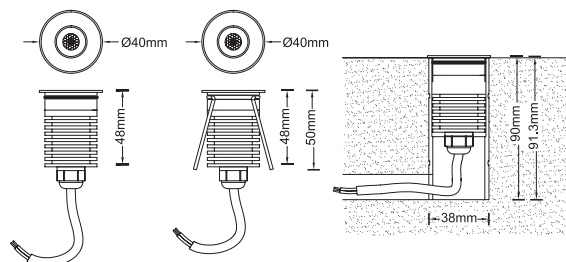

Light Distribution Curve (RGBW5500K, 1x30°)

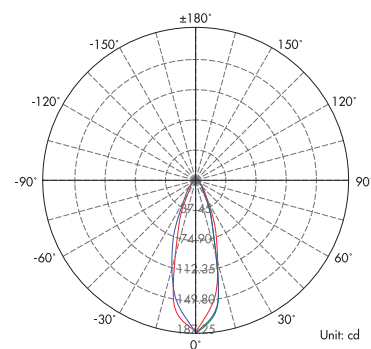

Lux distance Curve (RGBW5500K, 1x30°)

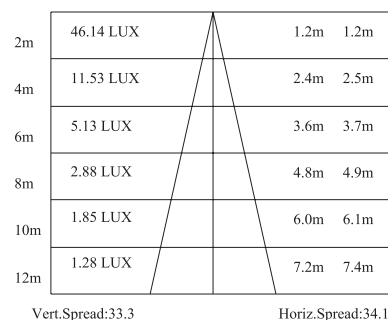

Parameter

General Data	
Item No.	IGD03200 (RGBW)-A
Power	4 Watts
LED type	1 PC 4W 4in1 RGBW5500K LED as standard (RGB optional)
Luminous flux	/
CCT	RGBW5500K
CRI	/
Beam angle	30°
Dimension	Ø40x50 (mm) Diameter x length
Cut out	38 mm
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V
Insulation class	Class III
Cable	1PC rubber cable 1.5M H05RN-F 5x0.5mm ² square
Driver	Low voltage constant current output, excluding the transformer
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Stainless steel 316
Glass	Step tempered Glass. T=4mm.
Loading capacity	320 kgs
Cable Gland	PG9 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Passivated (Anodizing) Aluminum CNC machined. Dark grey
Clip	With Aluminium spring that's for deck lights or ceiling lights application

Illumination Picture (1x30°)

