




Inground light

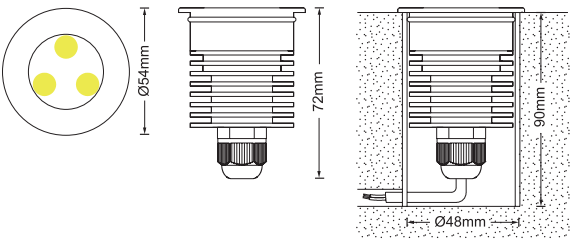

Light Distribution Curve (RGB, 25°)

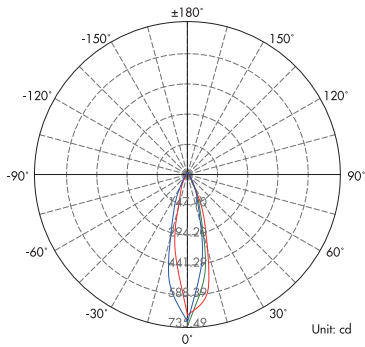

Lux distance Curve (RGB, 25°)

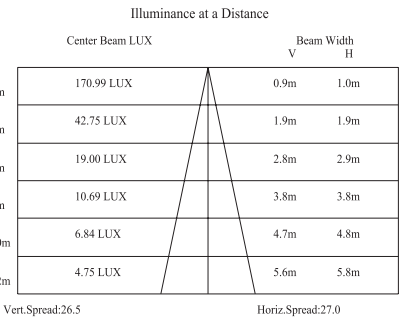

Parameter

General Data	
Item No.	IGD0323O (RGB)-A
Power	3 Watts
LED type	3pcs 1W 3in 1
Luminous flux	130 lm (All LED on)
CCT	RGB
CRI	70+
Beam angle	25°,45°
Dimension	54 x 72 (mm) Diameter x Height
Cut out	48 mm
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V
Insulation class	Class III
Cable	1PC rubber cable 1.5M H05RN-F 4x0.75mm square
Driver	Low voltage constant current output, excluding the transformer
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Stainless steel 316
Glass	Step tempered Glass. T=6mm.
Loading capacity	320 kgs
Cable Gland	PG9 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting sleeve	Passivated (Anodizing) Aluminum CNC machined. Dark grey
Packaging	
Inner box size	90*59*100 mm
Carton size	46.8*31.3*21.8 cm (50 PCS / carton)

Illumination Picture (25°)

