

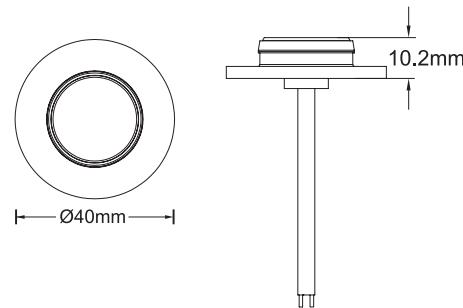




Surface light



Installation Drawing (It's compatible with the six kinds of cover in the before two pages!)



Parameter

General Data

Item No. IGD04040 (RGB)

Power 1.2 Watts

LED type 1 PC 3in1 RGB Epistar LED

Luminous flux 60 lm (all LEDs on)

CCT RGB

CRI 70+

Beam angle 120°

Dimension 40x10.2 (mm) Diameter x Height

Cut out /

Working Temp -20 ~ +50

Life Time 50,000 Hrs

Certifications CE, RoHS

Electrical Data

Input voltage DC12V/DC24V

Insulation class Class III

Cable 1PC 0.3M PVC cable 4 x 0.3mm square

Driver Low voltage constant current output, excluding the transformer

Construction Data

IP rating IP67 Waterproof

IK rating IK06

Housing Solid Passivated (Anodizing) Aluminum CNC machined

Protection finishing 20~25µm thickness anodized film for housing. Dark grey or grey

Trim Nine kinds of covers as options (in the before two pages)

Glass /

Loading capacity 320 kgs

Cable Gland Aluminium part IP67

Gasket O-ring PMQ silicone seal

Accessories

Mounting Sleeve Without sleeve, but with screws for easy surface mounting.

Packaging

Inner box size 38*38*20 mm

Carton size 25*25*18.5 cm (100PCS / carton)