




Inground light

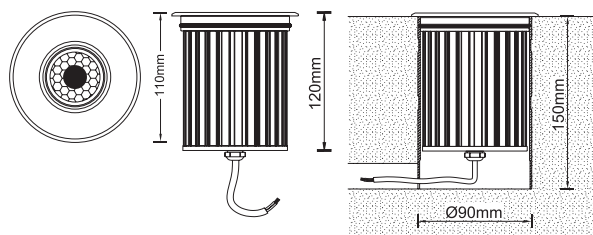

Light Distribution Curve (3000K, 36 °)

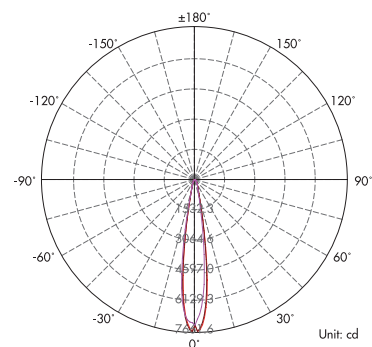

Lux distance Curve (3000K, 36°)

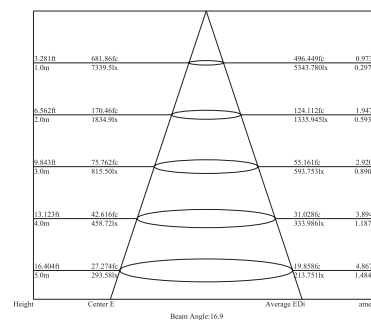

Parameter

General Data	
Item No.	IGD04490
Power	25 Watts +10%
LED type	1 PC 25W CREE COB LED
Luminous flux	1600lm~1800lm +10%
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	10°, 23°, 36°
Dimension	Ø110 x 120 (mm) Diameter x length
Cut out	90 mm
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100~265V
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1mm square
Driver	High voltage constant current output,with the transformer
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK08
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Stainless steel 316
Glass	Step tempered Glass. T=8mm.
Loading capacity	500 kgs
Cable Gland	PG gland
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Passivated (Anodizing) Aluminum CNC machined. Dark grey

Illumination Picture (36°)

