

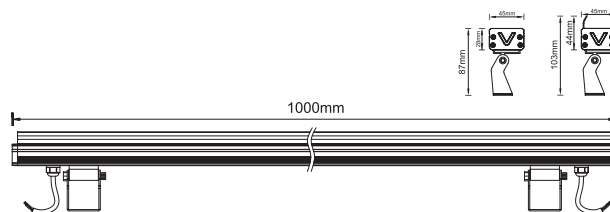



Wall Washer

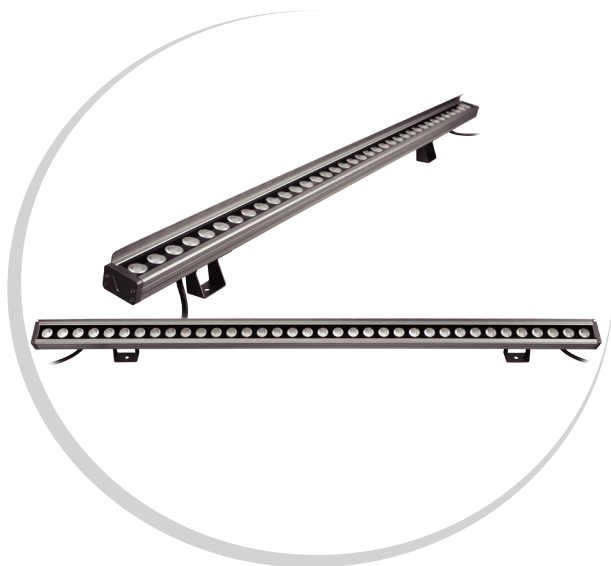

Light Distribution Curve (3000K, 15°40°)

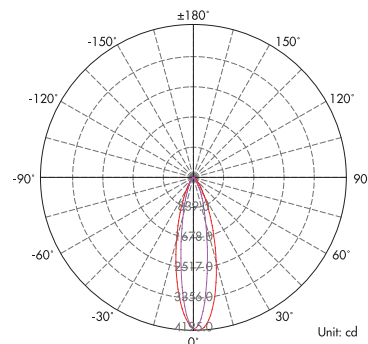

Lux distance Curve (3000K, 15°40°)



Parameter

General Data	
Item No.	LWW-3601-4800-B
Power	48W
LED type	36 PCS 1.3W OSRAM LED
Luminous flux	3200lm
CCT	2700K, 3000K, 4500K, 6000K
CRI	80+
Beam angle	12°/24°/30°/40°/60° or Oval lens 20°30°/15°40°/20°40°
Dimension	1000*45*28 mm (Length x Width x Height)
Cut out	/
Working Temp	-20 ~ +50
Certifications	50,000 Hrs
Life Time	CE, RoHS
Electrical Data	
Input voltage	DC24V (AC100~265V version optional)
Insulation class	Class III
Cable	2 PCS rubber cables with waterproof connectors, one side male, another side female
Driver	Low voltage constant current output, excluding the transformer
Control	Stand alone
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK04
Housing	Passivated (Anodizing) Aluminium
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Aluminium+glass
Glass	Tempered Glass T=4mm
Loading capacity	220kgs
Cable Gland	PG IP65
Gasket	PMQ silicone gasket seal
Accessories	
Bracket	Aluminium bracket
Barn door	Without barn door as standard, and with barn door as options

Illumination Picture (15x40°)

