




Projector

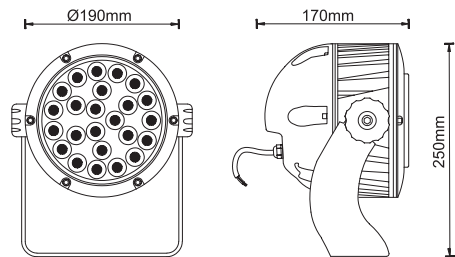

Light Distribution Curve (3000K, 28°)

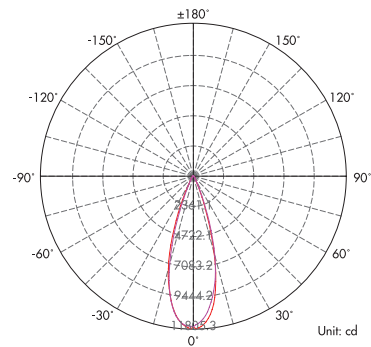

Lux distance Curve (3000K, 28°)

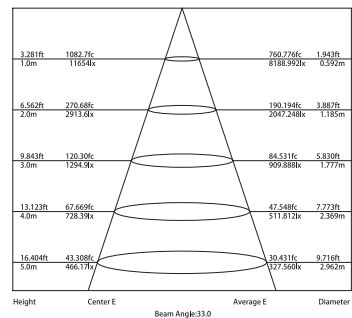

Parameter

General Data	
Item No.	PRL1180
Power	48 watts
LED type	48 PCS OSRAM 3030 LED
Luminous flux	90-100lm/W
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	15°, 25°, 30°, 45°, 60°
Dimension	Ø190*170 (mm) Diameter x Height
Cut out	/
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100~265V
Insulation class	Class I
Cable	1PC rubber cable 0.3M H05RN-F 3*1.5mm ² mm square
Driver	Built-in high voltage constant current driver with transformer
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK04
Housing	Die-casting Aluminium
Protection finishing	Powder coated painted in grey
Trim	Die-casting Aluminium
Glass	Step tempered Glass. T=4mm.
Loading capacity	220 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	The spike is optional

Illumination Picture (28°)

