




Projector

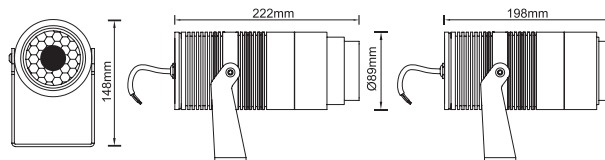

Light Distribution Curve (3000K, 40°)

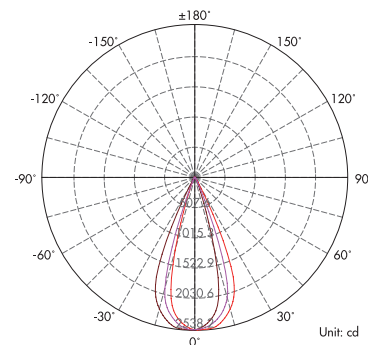

Lux distance Curve (3000K, 40°)

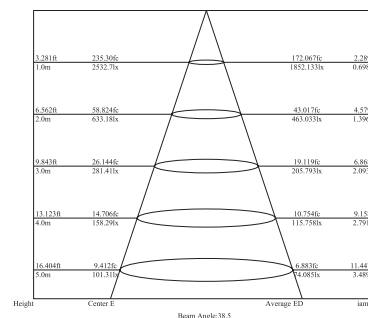

Parameter

General Data	
Item No.	PRL1510 (PULL)
Power	25 Watts $\pm 10\%$
LED type	1 PC 25W TOYONIA COB LED
Luminous flux	10°: 600 lm $\pm 10\%$, 40°: 920 lm $\pm 10\%$
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	Zoomable 10° to 40° adjustable
Dimension	Ø89 x 222 (mm) Diameter x length
Cut out	/
Life Time	50,000 Hrs
Working Temp	-20 ~ +50
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100~265V
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1mm square
Driver	High voltage constant current output, with the transformer
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Passivated (Anodizing) Aluminum
Glass	Tempered Glass. T=2mm.
Loading capacity	220 kgs
Cable Gland	PG gland
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	With Aluminium spike optional
Round base	With SS304 round base optional

Illumination Picture (40°)

