




Projector

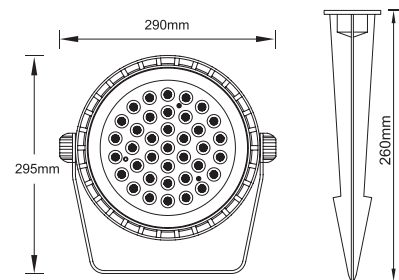

Light Distribution Curve (3000K, 30°)

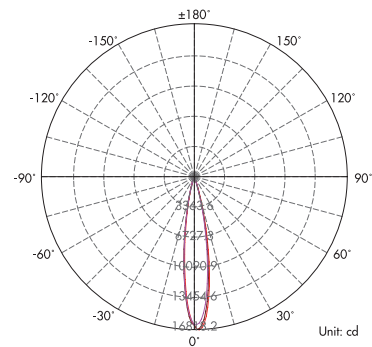

Lux distance Curve (3000K, 30°)

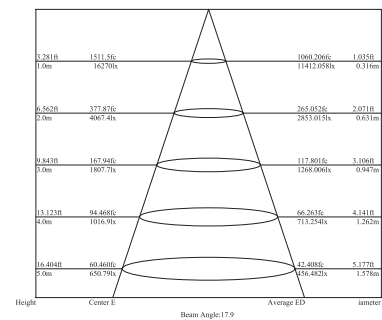

Illumination Picture (30°)



Parameter

General Data	
Item No.	PRL1600 /PRL1630-RGB-A /PRL2710
Power	36 Watts / 36 Watts
LED type	36 PCS 1W OSRAM LED / RGB 12PCS Red LED, 12 PCS Green LED, 12PCS Blue LED OSRAM LED
Luminous flux	2950lm~3100 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	10°, 25°, 30°, 45°, 60°, 85°
Dimension	250 x 295 x 87 (mm) Diameter x Height x Thickness
Cut out	/
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC 90V-265V
Insulation class	Class I
Cable	1PC rubber cable 1.5M H05RN-F 3 or 4 x0.75mm square
Driver	Built-in high voltage constant current driver with transformer
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK04
Housing	Die-casting Aluminium
Protection finishing	Powder coated painting in black color
Trim	Die-casting Aluminium
Glass	Tempered Glass. T=4mm
Loading capacity	220 kgs
Cable Gland	PG7 IP67
Gasket	PMQ silicone gasket seal
Accessories	
Bracket	With Aluminium spike as options