




Surface light

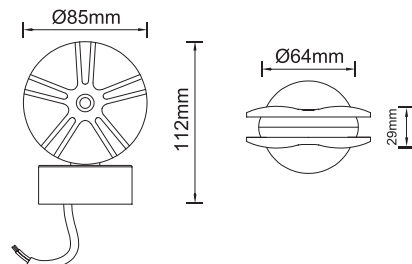

Light Distribution Curve (3000K, 300° * 5°)

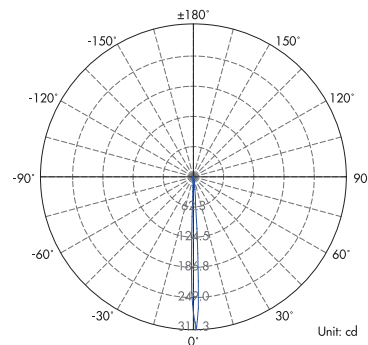

Lux distance Curve (3000K, 300° * 5°)

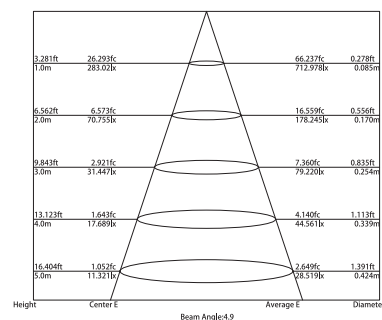

Parameter

General Data	
Item No.	PRL2200
Power	5 Wwatts
LED type	4PCS CREE XPE LED
Luminous flux	110~130 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	300°*5°
Dimension	Ø85 x 112 (mm) Diameter x length
Cut out	/
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100~265V as standard, or DC24V as optional
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1 mm square
Driver	Built-in high voltage constant current driver with transformer
Construction Data	
IP rating	IP66 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Solid Passivated (Anodizing) Aluminum CNC machined
Glass	/
Loading capacity	320 kgs
Cable Gland	PG7
Gasket	Silicone O-ring
Accessories	
base	Aluminum round base with screws for surface mounting

Illumination Picture (300° * 5°)

