




Surface light

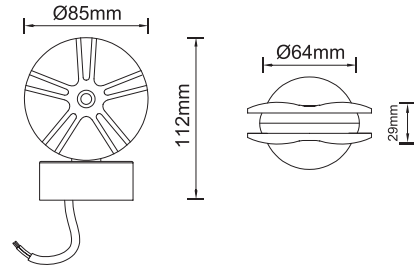

Light Distribution Curve (3000K, 300° * 5°)

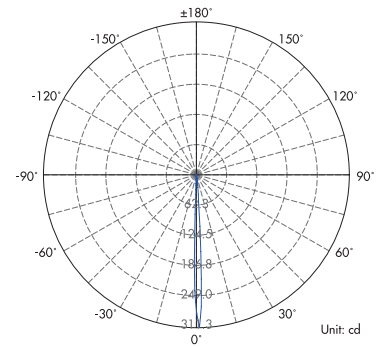

Lux distance Curve (3000K, 300° * 5°)

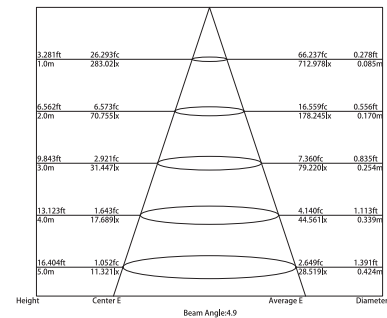

Parameter

General Data	
Item No.	PRL223O
Power	5 Wwatts
LED type	4PCS 4 in 1 RGBW LED
Luminous flux	110~130 lm
CCT	RGB+WW/NW/CW
CRI	80+
Beam angle	300°*5°
Dimension	Ø85 x 112 (mm) Diameter x length
Cut out	/
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V
Insulation class	Class III
Cable	1PC rubber cable 1.5M H05RN-F 5x0.75mm square for RGBW
Driver	Low voltage constant current output, excluding the transformer
Construction Data	
IP rating	IP66 Waterproof
IK rating	IK07
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Solid Passivated (Anodizing) Aluminum CNC machined
Glass	/
Loading capacity	320 kgs
Cable Gland	PG7
Gasket	Silicone O-ring
Accessories	
base	Aluminum round base with screws for surface mounting

Illumination Picture (300° * 5°)

