




Projector

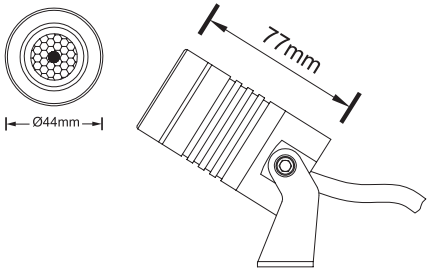

Light Distribution Curve (RGBW5500K, 23°)

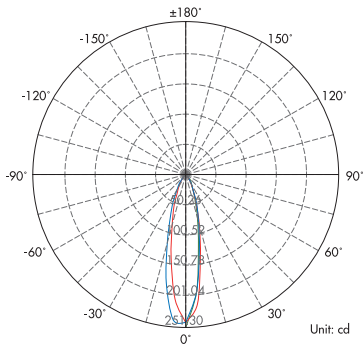

Lux distance Curve (RGBW5500K, 23°)

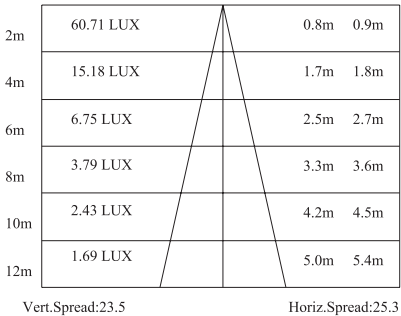

Parameter

| General Data         |                                                                                           |
|----------------------|-------------------------------------------------------------------------------------------|
| Item No.             | PRL2770 (RGBW)-A                                                                          |
| Power                | 5 Watts                                                                                   |
| LED type             | 1 PC 5W RGBW5500K 4in1 COB LED                                                            |
| Luminous flux        | /                                                                                         |
| CCT                  | RGBW5500K                                                                                 |
| CRI                  | /                                                                                         |
| Beam angle           | 10°, 23°, 38°                                                                             |
| Dimension            | 44 x 77 (mm) Diameter x Height                                                            |
| Cut out              | /                                                                                         |
| Working Temp         | -20 ~ +50                                                                                 |
| Life Time            | 50,000 Hrs                                                                                |
| Certifications       | CE, RoHS                                                                                  |
| Electrical Data      |                                                                                           |
| Input voltage        | DC12V                                                                                     |
| Insulation class     | Class III                                                                                 |
| Cable                | 1PC rubber cable 1.5M HO5RN-F 5x0.5mm square                                              |
| Driver               | Low voltage constant current output, excluding the transformer                            |
| Construction Data    |                                                                                           |
| IP rating            | IP67 Waterproof                                                                           |
| IK rating            | IK04                                                                                      |
| Housing              | Solid Passivated (Anodizing) Aluminum CNC machined                                        |
| Protection finishing | 20~25µm thickness anodized film for housing. Dark grey standard, silver color as options. |
| Trim                 | Passivated (Anodizing) Aluminum                                                           |
| Glass                | Step tempered Glass. T=2mm.                                                               |
| Loading capacity     | 220 kgs                                                                                   |
| Cable Gland          | PG9 IP67                                                                                  |
| Gasket               | O-ring PMQ silicone seal                                                                  |
| Accessories          |                                                                                           |
| Spike                | With PVC spike as spike spot lights (Standard)                                            |
| Round base           | With SS304 round base for wall mounting (optional)                                        |

Illumination Picture ( 23°)

