



Light Distribution Curve (RGB, 45°)

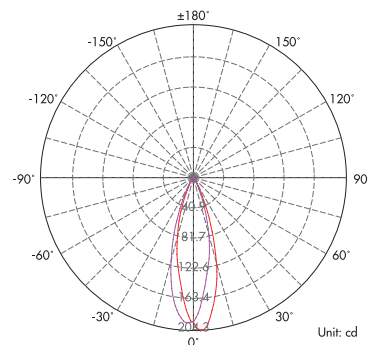

Lux distance Curve (RGB, 45°)

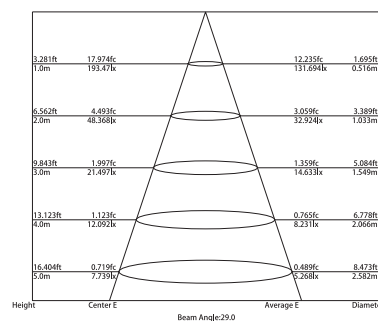

Parameter

General Data	
Item No.	UWL232U (RGB)
Power	3 Watts
LED type	1PC 3030 RGB LED
Luminous flux	/
CCT	RGB
CRI	/
Beam angle	15°, 25°, 38°, 45°, 60°, 120°
Dimension	Ø45 x 36 (mm) Diameter x length
Cut out	40 mm
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC 12V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 5x0.5mm square
Driver	Low voltage input, constant current output, excluding the transformer
Construction Data	
IP rating	IP68 Waterproof
IK rating	IK06
Housing	Stainless steel 316
Protection finishing	Stainless steel 316
Trim	Stainless steel 316
Glass	Step tempered Glass. T=4mm.
Loading capacity	320 kgs
Cable Gland	PG gland
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Anti-corrosion grey PVC tube (Convex type box as options)

Illumination Picture (45°)

