




Projector

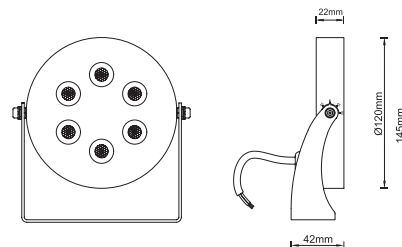

Light Distribution Curve (3000K, 10°)

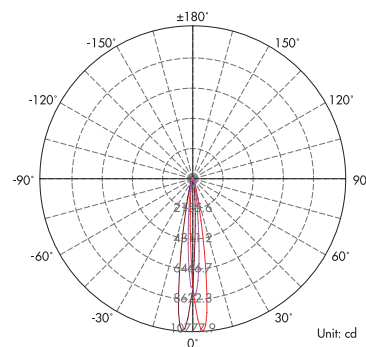

Lux distance Curve (3000K, 10°)

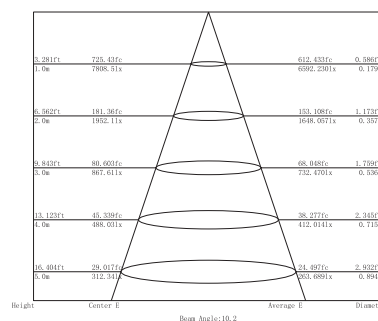

Illumination Picture (10°)



Parameter

General Data	
Item No.	UWL248U
Power	12 Watts +10%
LED type	6PCS 2W CREE XPE LED
Luminous flux	720 lm+10%
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	6°,8°,10°,17°,23°,28°,43°
Dimension	145*120*47 (mm) Height x Diameter x Thickness
Cut out	/
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1 mm square
Driver	Low voltage input, constant current output, excluding the transformer
Construction Data	
IP rating	IP68 Waterproof
IK rating	IK09
Housing	Stainless steel 316
Protection finishing	Stainless steel 316
Trim	Stainless steel 316
Glass	Tempered Glass. T=2mm.
Loading capacity	700 kgs
Cable Gland	PG gland
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	PVC spike as optional