



Wall light

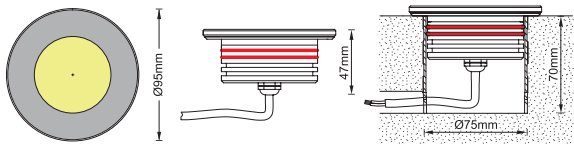

Light Distribution Curve (3000K, 120°)

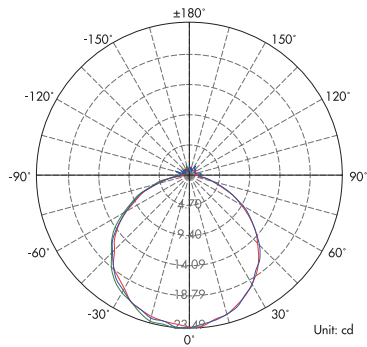

Lux distance Curve (3000K, 120°)

Illuminance at a Distance

	Center Beam LUX	Beam Width	
		V	H
2m	5.79 LUX	6.1m	6.2m
4m	1.45 LUX	12.1m	12.4m
6m	0.64 LUX	18.2m	18.7m
8m	0.36 LUX	24.3m	24.9m
10m	0.23 LUX	30.3m	31.1m
12m	0.16 LUX	36.4m	37.3m

Vert.Spread:113.3

Horiz.Spread:114.6

Illumination Picture (120°)



Parameter

General Data	
Item No.	WLR2240
Power	4 Watts
LED type	18 pcs 2835 SMD LED
Luminous flux	85-95 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	120°
Dimension	95x47 (mm) Diameter x Height
Cut out	75 mm
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100~240V
Insulation class	Class I
Cable	1 x cable 0.3 M H05RN-F 3x0.75mm square to open wires
Driver	Built-in high voltage constant current driver with transformer
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Tempered glass painted in milky white
Glass	Tempered Glass. T=5mm.
Loading capacity	320 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Anti-corrosion PVC. Grey.