




Wall light

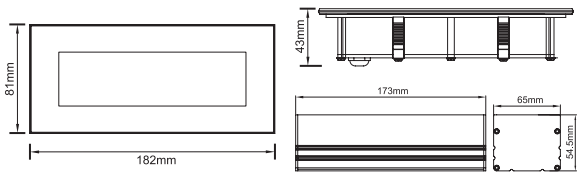

Light Distribution Curve (3000K, 120°)

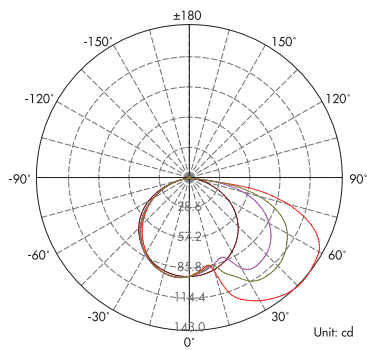

Lux distance Curve (3000K, 120°)

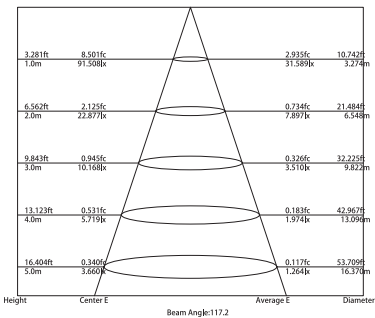

Parameter

General Data	
Item No.	WLR226O
Power	5 Watts
LED type	30 pcs 2835 SMD LED
Luminous flux	380~400 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	Asymmetric downward 120°
Dimension	182x81x43 mm (Length x VWide x Height)
Cut out	173 x 65 x 54.5 mm
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100~265V
Insulation class	Class I
Cable	1 x cable 0.3 M H05RN-F 3x0.75mm square to open wires
Driver	Built-in high voltage constant current driver with transformer
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Tempered glass painted in milky white
Glass	Tempered Glass. T=4mm.
Loading capacity	320 kgs
Cable Gland	PG7 IP67
Gasket	Flat PMQ silicone seal
Accessories	
Mounting box	Aluminum
Packaging	
Inner box size	208*105*70 mm
Carton size	42*22*46 cm [24 PCS / carton]

Illumination Picture (120°)

