




Wall light

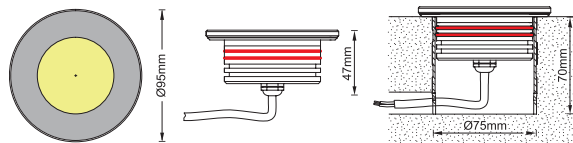

Light Distribution Curve (3000K, 1x120°)

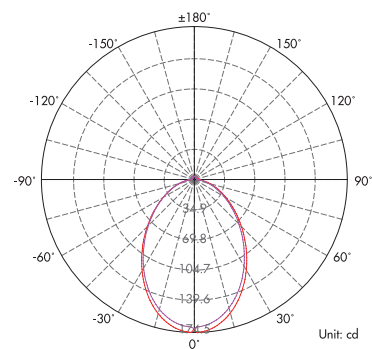

Lux distance Curve (3000K, 1x120°)

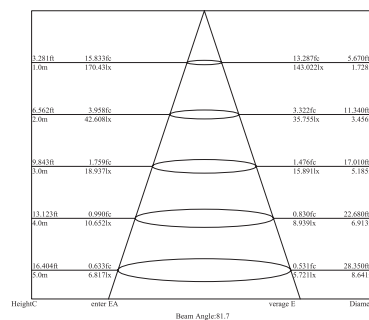

Parameter

General Data

Item No.	WLR228O
Power	10 Watts
LED type	12 pcs 3030 LED
Luminous flux	400~450 lm
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beam angle	120°
Dimension	95 x 47 (mm) Diameter x Height
Cut out	75 mm
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS

Electrical Data

Input voltage	DC12V
Insulation class	Class III
Cable	1PC rubber cable 0.3M H05RN-F 2x0.75mm square
Driver	Low voltage constant current output, excluding the transformer

Construction Data

IP rating	IP65 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Frosted Tempered Glass.
Glass	Tempered Glass. T=5mm.
Loading capacity	320 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal

Accessories

Mounting Sleeve	Anti-corrosion PVC. Grey.
Clip	With strong clip as options for ceiling lights application

Packaging

Inner box size	125*125*95 mm
Carton size	64.3*39*21 cm (30PCS / carton)

Illumination Picture (1x120°)

