

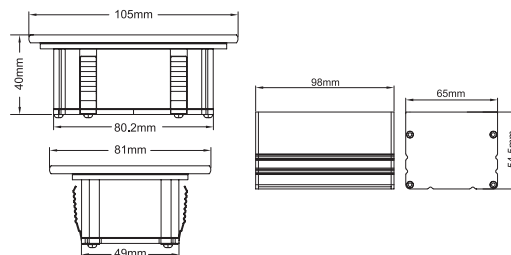



Wall light

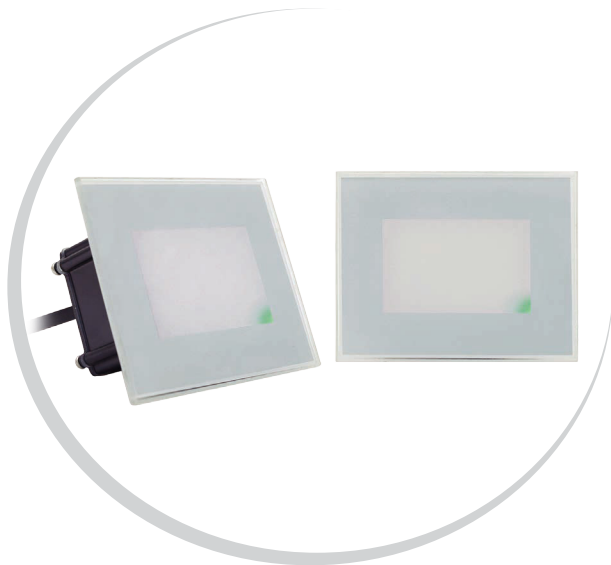

Light Distribution Curve (3000K, 120°)

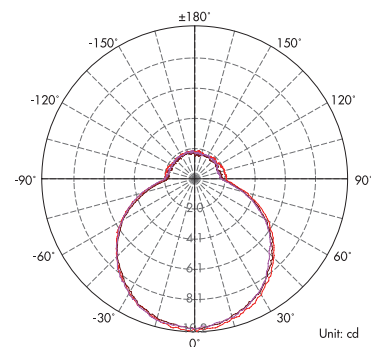

Lux distance Curve (3000K, 120°)

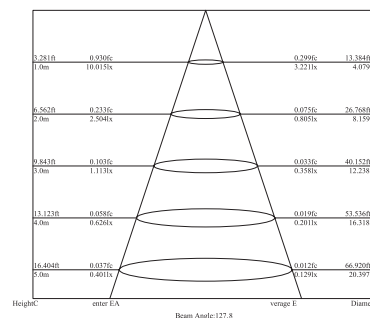

Parameter

General Data

Item No.	WLR2340
Power	4 Watts
LED type	30 pcs 2835 SMD LED
Luminous flux	100~120 lm when it's in normal status 50~60 lm when it's emergency time
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	120°
Dimension	105x81x40 mm (Length x Wide x Height)
Cut out	98x65x54.5 mm
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS

Electrical Data

Input voltage	AC 220-240V or AC110~120V
Insulation class	Class I
Cable	1 x cable 0.3 M H05RN-F 3x0.75mm square to open wires
Driver	Built-in high voltage constant current driver with transformer
Battery	With built-in lithium battery for emergency illumination with 90 minutes at min.

Construction Data

IP rating	IP65 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25μm thickness anodized film for housing. Dark grey
Trim	Tempered glass painted in milky white
Glass	Tempered Glass. T=4mm.
Loading capacity	320 kgs
Cable Gland	PG7 IP67
Gasket	Flat PMQ silicone seal

Accessories

Mounting Sleeve	Aluminium
-----------------	-----------

Packaging

Inner box size	130*105*80 mm
Carton size	54x28.5x34 cm (32 PCS items each carton)

Illumination Picture (120°)

