




Wall light

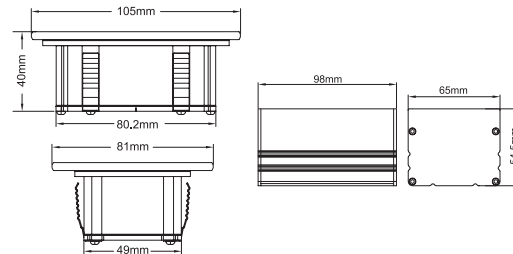

Light Distribution Curve (4000K, 45° x120°)

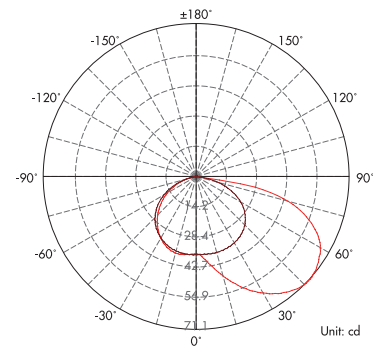

Lux distance Curve (4000K, 45° x120°)

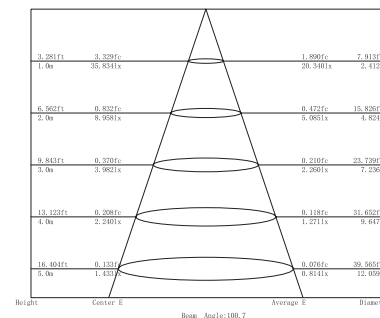

Parameter

General Data	
Item No.	WLR2480
Power	3 Watts
LED type	15 pcs 2835 SMD LED
Luminous flux	160~180 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	Asymmetric downward 45° x 120° (Tilt x Pan)
Dimension	105x81x40 mm (Length x Wide x Height)
Cut out	98 x 65x 54.5 mm
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100~265V
Insulation class	Class I
Cable	1 x cable 0.3 M H05RN-F 3x0.75mm square to open wires
Driver	Built-in high voltage constant current driver with transformer
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Tempered glass painted in milky white
Glass	Tempered Glass. T=4mm.
Loading capacity	320 kgs
Cable Gland	PG7 IP67
Gasket	Flat PMQ silicone seal
Accessories	
Mounting box	Aluminum

Illumination Picture (45°x120°)

