




Wall light

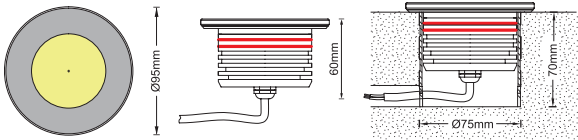


Light Distribution Curve (RGB all LEDs on, 1x120°)

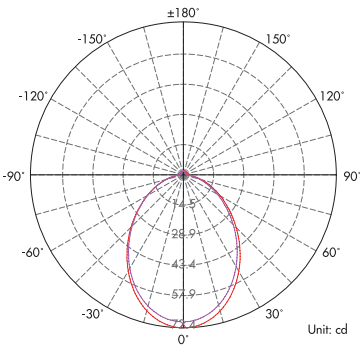

Lux distance Curve (RGB all LEDs on, 1x120°)

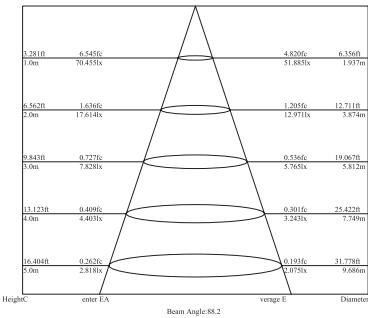

Illumination Picture (1x120°)

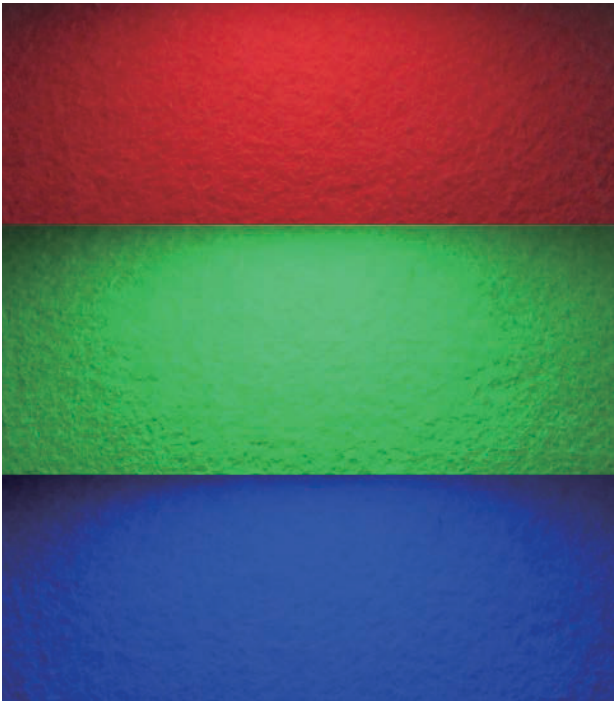

Parameter

General Data

Item No.	WLR2520
Power	10 Watts
LED type	18 pcs 5050 RGB LED
Luminous flux	350 lm (All LEDs on)
CCT	RGB
CRI	70+
Beam angle	120°
Dimension	95 x 60 (mm) Diameter x Height
Cut out	75 mm
Life Time	50,000 Hrs
Working Temp	-20 ~ +50
Certifications	CE, RoHS

Electrical Data

Input voltage	DC 12V
Insulation class	Class III
Cable	1PC rubber cable 0.3M H05RN-F 4x0.75mm square
Driver	Low voltage constant current output, excluding the transformer

Construction Data

IP rating	IP65 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Frosted Tempered Glass
Glass	Tempered Glass. T=5mm.
Loading capacity	320 kgs
Cable Gland	PG9 IP67
Gasket	O-ring PMQ silicone seal

Accessories

Mounting Sleeve	Anticorrosion PVC. Grey.
Clip	With strong clip as options for ceiling lights application