

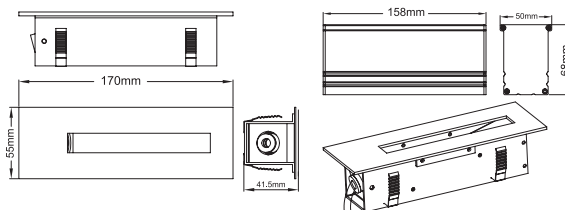



Wall light



Light Distribution Curve (3000K, 30°)

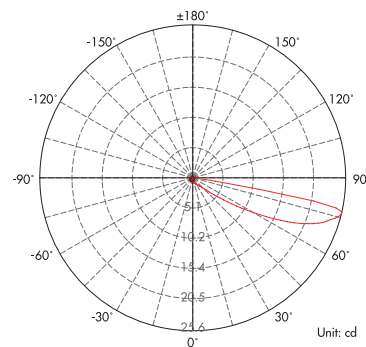

Lux distance Curve (3000K, 30°)

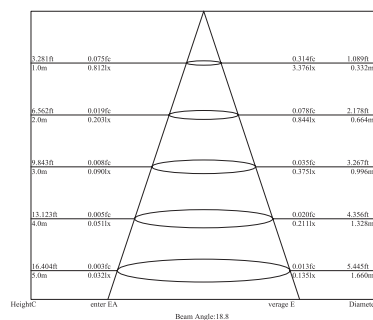

Parameter

General Data

Item No.	WLR2620
Power	3 Watts
LED type	1 PC CREE XPE LED
Luminous flux	110~130 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	30°
Dimension	170 x 55 x 41.5 (mm) Diameter x Width x Height
Cut out	158 x 50 x 68 (mm) (Length x Width x Height)
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS

Electrical Data

Input voltage	DC 12V/DC24V (AC100~265V optional)
Insulation class	Class III
Cable	1 x cable 0.3 M HO5RN-F 2x0.5mm square to open wires
Driver	Low voltage constant current output, excluding the transformer (With separately driver for options)

Construction Data

IP rating	IP65 Waterproof
IK rating	IK06
Housing	Powder coated painting in white color Aluminium
Protection finishing	Powder coated painting in white color
Trim	Powder coated painting in white color Aluminium
Glass	Tempered glass
Loading capacity	320 kgs
Cable Gland	IP65 Aluminium part
Gasket	O-ring PMQ silicone seal

Accessories

Mounting Sleeve	Aluminium box in dark grey
-----------------	----------------------------

Illumination Picture (30°)

