

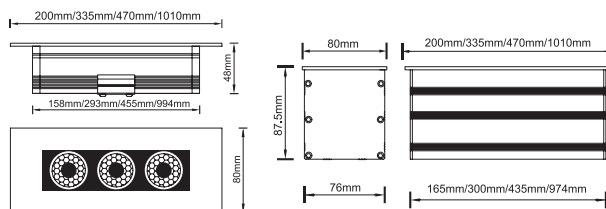



Inground light

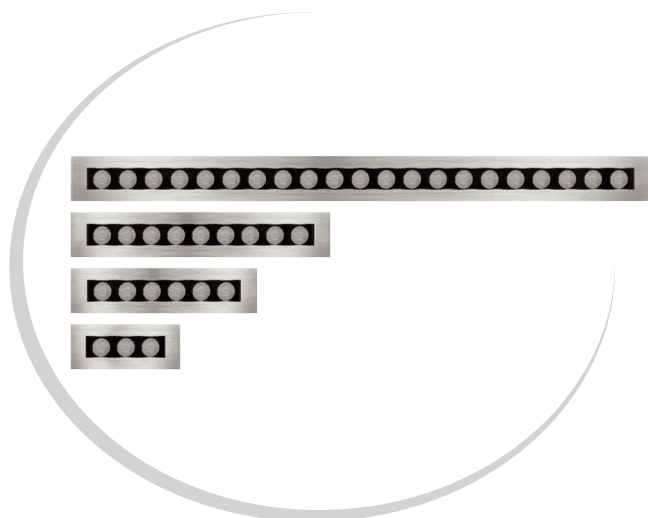


Light Distribution Curve (3000K,7W,10x30°)

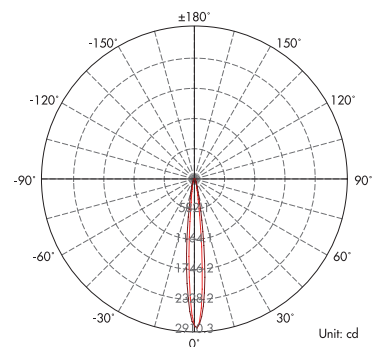

Lux distance Curve (3000K,7W,10x30°)

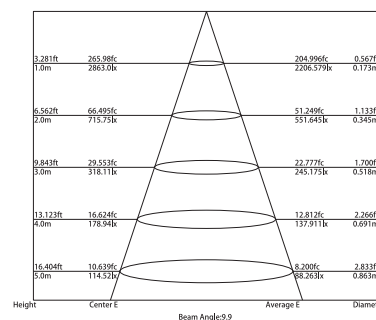

Illumination Picture (10x30°)

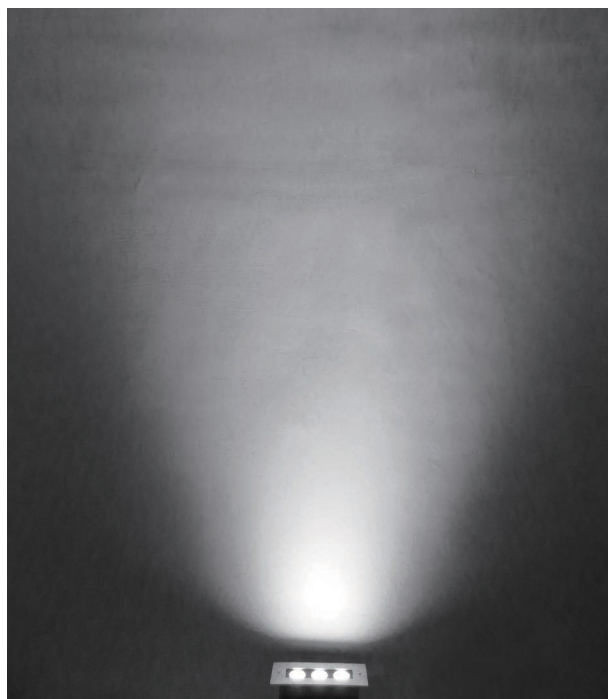

Parameter

General Data

Item No.	WLR264O / WLR266O / WLR268O / WLR270O
Power	7W / 14W/ 21W/ 49W +10%
LED type	3PCS / 6PCS/ 9PCS / 21PCS CREE XPE LED
Luminous flux	350lm / 700lm / 1050lm / 2450lm +10%
CCT	2700K, 3000K, 4000K, 6000K, R,G,Y,B
CRI	80+
Beam angle	5°,8°,12°,24°,36°,60°, or oval lens 10°30°
Dimension	200/335/470/1010x 80 x 87.5 (mm) Length x Width x Height
Cut out	165mm/300mm/435mm/974mm x 76 x 87.5 (mm) Length x Width x Height
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS

Electrical Data

Input voltage	DC12V-DC24V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1mm square
Driver	Low voltage constant current driver without transformer

Construction Data

IP rating	IP67 Waterproof
IK rating	IK08
Housing	Passivated(Anodizing) Aluminum
Protection finishing	20~25μm thickness anodized film for housing. Dark grey
Trim	Stainless steel 316
Glass	Step tempered Glass. T=8mm.
Loading capacity	500 kgs
Cable Gland	PG gland
Gasket	PMQ silicone seal

Accessories

Mounting Sleeve	Passivated (Anodizing) Aluminum. Dark grey
-----------------	--