




Handrail light

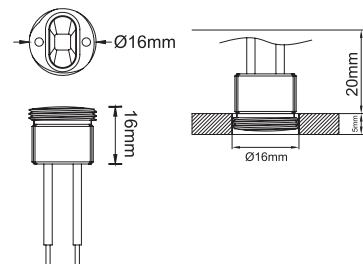

Light Distribution Curve (3000K, 80°)

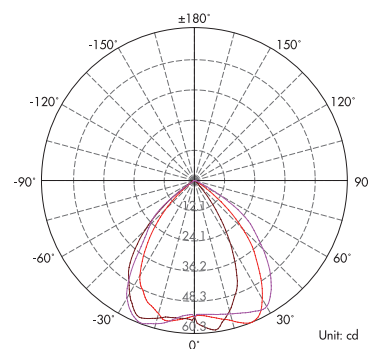

Lux distance Curve (3000K, 80°)

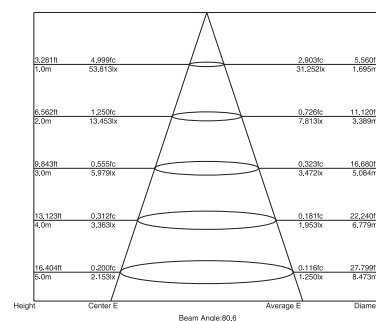

Illumination Picture (80°)



Parameter

General Data	
Item No.	80°: WLR2740 / 30x60°: WLR2760
Power	1.5 Watts +10%
LED type	1 PC CREE XPG LED
Luminous flux	95 lm +10%
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	80° for DL-1016-0100-A / Asymmetrical 30x60° for DL-1016-0100-B
Dimension	16 x 16 (mm) (Diameter x Height)
Cut out	16mm
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC3V 500mA constant current
Insulation class	Class III
Cable	1PC teflon cable 0.25M 2*0.3mm square
Driver	without driver, need external constant current driver
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK06
Housing	Chrome Plated Copper CNC machined
Protection finishing	Chrome Plated
Trim	Chrome Plated Copper CNC machined
Glass	/
Loading capacity	110 kgs
Cable Gland	/
Gasket	/
Accessories	
Clip	SS304 clip for installation or taking off the fixture from the handrail