




Wall light

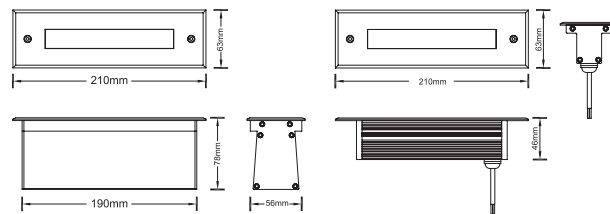

Light Distribution Curve

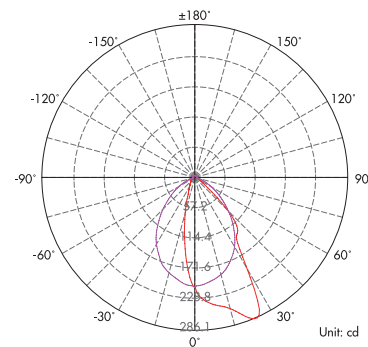

Lux distance Curve

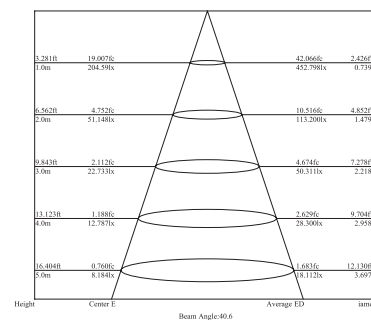

Parameter

General Data	
Item No.	VLR2820 (frosted glass)
Power	7.5 Watts
LED type	30 PCS OSRAM 2835 SMD LED
Luminous flux	220~250lm
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beam angle	120°
Dimension	210 x 63 x 78 (mm) Length x Width x Height
Cut out	185 x 57 x 75 (mm) Length x Width x Height
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-255V
Insulation class	Class I
Cable	1 PC rubber cable 1M H05RN-F 3x1mm square
Driver	Built-in high voltage constant current driver with transformer
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK08
Housing	Passivated(Anodizing) Aluminum
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Passivated(Anodizing) Aluminum
Glass	Step tempered Glass. T=8mm.
Loading capacity	200 kgs
Cable Gland	PG9 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Passivated (Anodizing) Aluminum CNC machined. Dark grey

Illumination Picture (Assymetrical 30° tilt +120° pan beam)

