




# Wall light

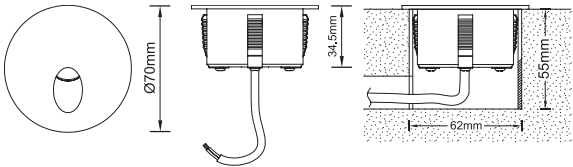

Light Distribution Curve (3000K, 30°)

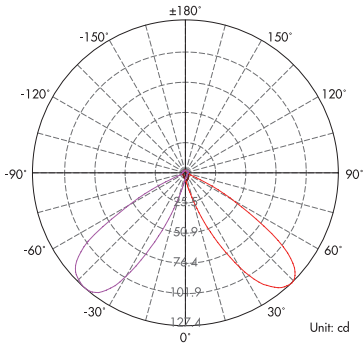

Lux distance Curve (3000K, 30°)

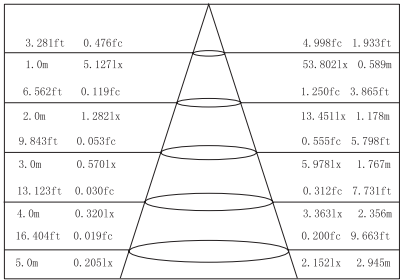

Height Center E Beam Angle:32.8 Average E Diameter

## Parameter

| General Data         |                                                                                                     |
|----------------------|-----------------------------------------------------------------------------------------------------|
| Item No.             | WLR2920                                                                                             |
| Power                | 3 Watts                                                                                             |
| LED type             | 1 PC CREE XPE LED (WWW, NW, CW.1 Watt to 3 Watt optional)                                           |
| Luminous flux        | 110~130lm                                                                                           |
| CCT                  | 2700K, 3000K, 4000K, 6000K                                                                          |
| CRI                  | 80+                                                                                                 |
| Beam angle           | 30°                                                                                                 |
| Dimension            | 70 x 34.5 (mm) Diameter x Height                                                                    |
| Cut out              | 62 mm                                                                                               |
| Working Temp         | -20 ~ +50                                                                                           |
| Life Time            | 50,000 Hrs                                                                                          |
| Certifications       | CE, RoHS                                                                                            |
| Electrical Data      |                                                                                                     |
| Input voltage        | DC 12V/DC24V (AC100~265V optional)                                                                  |
| Insulation class     | Class III                                                                                           |
| Cable                | 1 x cable 0.3 M HO5RN-F 2x0.5mm square to open wires                                                |
| Driver               | Low voltage constant current output, excluding the transformer (With separately driver for options) |
| Construction Data    |                                                                                                     |
| IP rating            | IP65 Waterproof                                                                                     |
| IK rating            | IK06                                                                                                |
| Housing              | Satin Nickel Aluminium                                                                              |
| Protection finishing | Satin Nickel                                                                                        |
| Trim                 | Satin Nickel Aluminium                                                                              |
| Glass                | Tempered glass                                                                                      |
| Loading capacity     | 320 kgs                                                                                             |
| Cable Gland          | IP65 Aluminium part                                                                                 |
| Gasket               | O-ring PMQ silicone seal                                                                            |
| Accessories          |                                                                                                     |
| Mounting Sleeve      | Anti-corrosion PVC. Grey.                                                                           |

Illumination Picture ( 30°)

