



Handrail light



Light Distribution Curve (3000K, 120°)

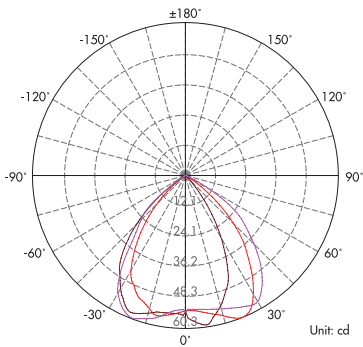

Lux distance Curve (3000K, 120°)

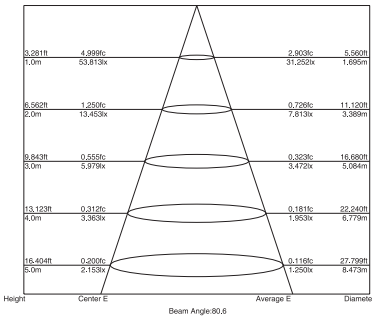

Parameter

General Data

Item No.	WLR296O
Power	3.5 Watts
LED type	1 PC LED
Luminous flux	138 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	120°
Dimension	385x17.5x21(mm)
Suitable for	Handrail thickness 0.8-3mm
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS

Electrical Data

Input voltage	24VDC
Insulation class	Class III
Cable	1PC teflon cable 0.25M 2*0.3mm square
Driver	without driver, need external constant current driver

Construction Data

IP rating	IP65 Waterproof
IK rating	IK04
Housing	STAINLESS STEEL

Illumination Picture (120°)

