




Wall Light

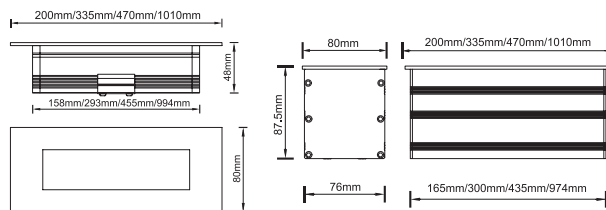


Light Distribution Curve (3000K, 7W, 120°)

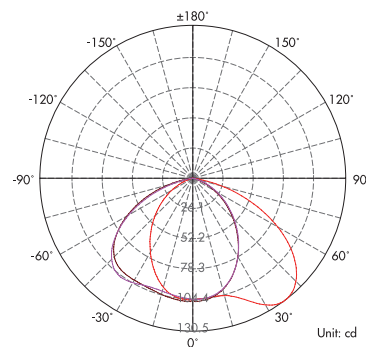

Lux distance Curve (3000K, 7W, 120°)

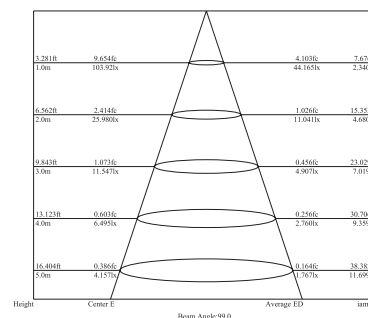

Illumination Picture (7W, 120°)

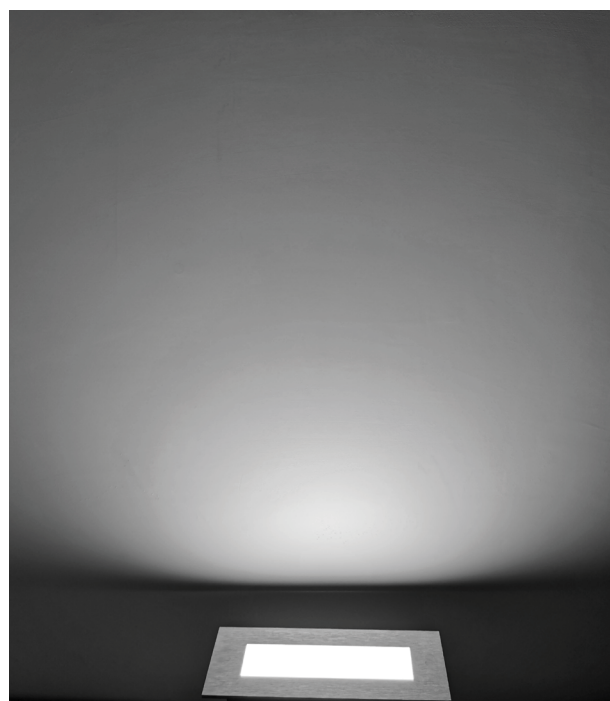

Parameter

General Data

Item No.	VLR3020
Power	7W / 14W/ 21W/ 49W +10%
LED type	OSRAM 2835SMD LED
Luminous flux	200lm /390lm / 580lm /1400lm+10%
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	120°
Dimension	200/335/470/1010x 80 x 87.5 (mm) Length x Width x Height
Cut out	165mm/300mm/435mm/974mm x 76 x 87.5 (mm) Length x Width x Height
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS

Electrical Data

Input voltage	DC24V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1mm square
Driver	Low voltage constant current driver without transformer

Construction Data

IP rating	IP67 Waterproof
IK rating	IK08
Housing	Passivated(Anodizing) Aluminum
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Stainless steel 316
Glass	Step tempered frosted glass. T=8mm
Loading capacity	500 kgs
Cable Gland	PG gland
Gasket	PMQ silicone seal

Accessories

Mounting Sleeve	Passivated (Anodizing) Aluminum. Dark grey
-----------------	--