
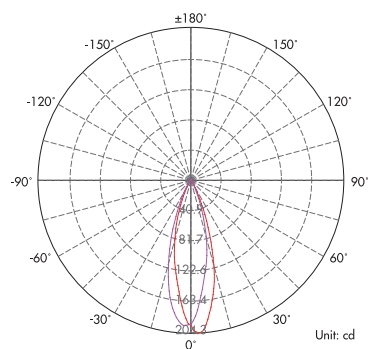


Inground light

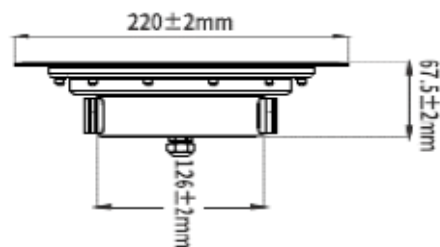


Lux distance Curve (RGB, 45°)

Use only in permanent immersion in water as to avoid damaging to LED!

Parameter

General Data	
Item No.	WLS176O
Power	18 Watts
LED type	1PC 3030 RGB LED
Luminous flux	1800 lm
CCT	2700 ~ 6500K
CRI	80+
Beam angle	15°, 25°, 38°, 45°
Dimension	220x220x67.5
Cut out	200 mm
Working Temp	-20 ~ +55
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 5x0.5mm square
Driver	Low voltage input, constant current output, excluding the transformer
Construction Data	
IP rating	IP68 Waterproof
IK rating	IK06
Housing	Stainless steel 316
Protection finishing	Stainless steel 316
Trim	Stainless steel 316
Glass	Step tempered Glass. T=4mm.
Loading capacity	320 kgs
Cable Gland	PG gland
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Anti-corrosion grey PVC tube (Convex type box as options)

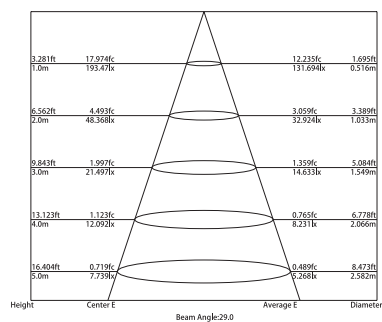

Illumination Picture (45°)

