

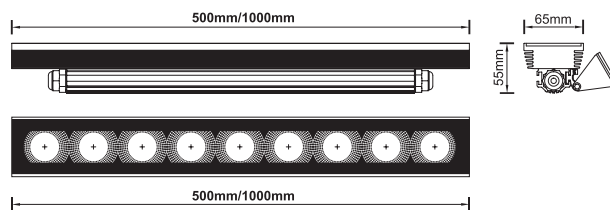



Wall Washer

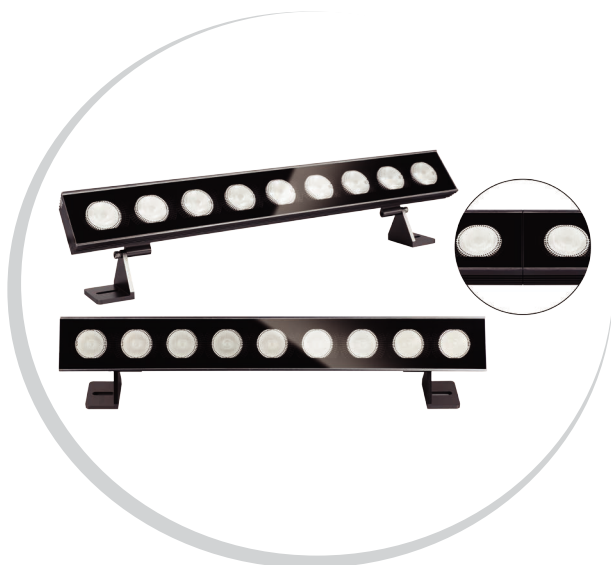

Light Distribution Curve (RGBW, 10x30°)

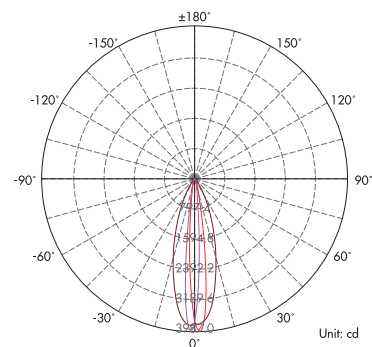

Lux distance Curve (RGBW, 10x30°)

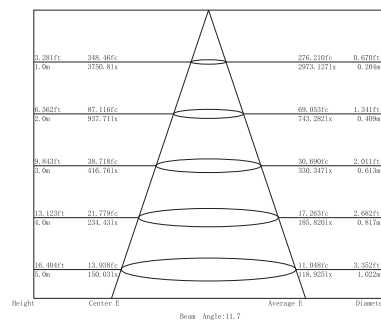

Parameter

General Data

Item No.	WLW0710 / WLW0740
Power	18 Watts / 36 Watts
LED type	9 PCS / 18 PCS x 4in1 RGBW 3030SMD LED
Luminous flux	720 lm / 1440lm
CCT	RGBW5500K
CRI	80+
Beam angle	5°, 8°, 12°, 24°, 36°, 60°, 10°30°
Dimension	500*65*55 mm / 1000*65*55L x W x H
Cut out	/
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS

Electrical Data

Input voltage	DC12V
Insulation class	Class III
Cable	2 PCS rubber cable 20CM cables
Driver	Low voltage constant current output, excluding the transformer
Control	Stand alone

Construction Data

IP rating	IP68 Waterproof
IK rating	IK04 for wall washer
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Glass
Glass	Tempered Glass. T=3mm
Loading capacity	220kgs
Cable Gland	PG9 IP68
Gasket	PMQ silicone gasket seal

Accessories

Bracket	Aluminium bracket for wall washer
---------	-----------------------------------

Illumination Picture (10x30°)

