

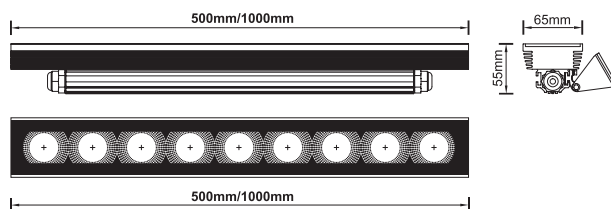



Wall Washer

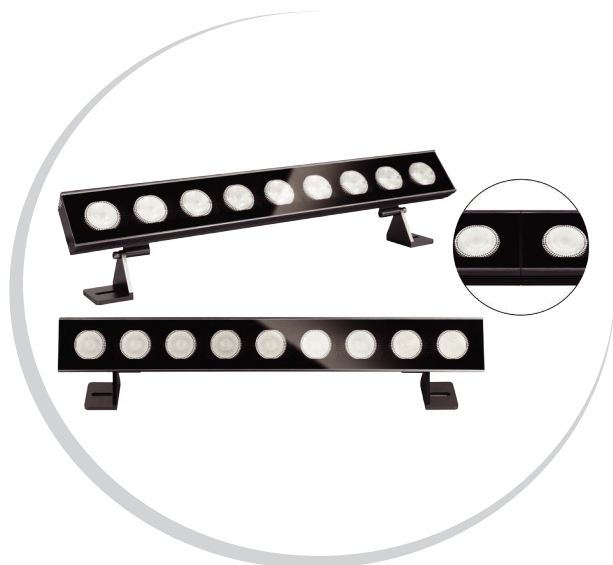

Light Distribution Curve (3000K, 10x30°)

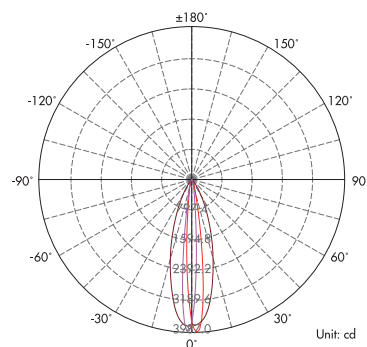

Lux distance Curve (3000K, 10x30°)

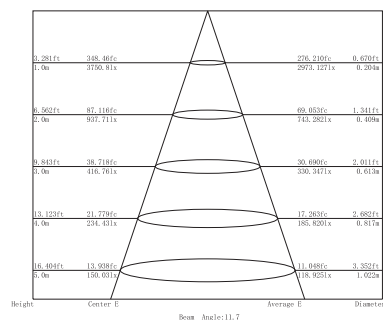

Parameter

General Data	
Item No.	WLW0950 / WLW0980
Power	48 Watts / 96 Watts
LED type	9PCS / 18PCS CREE XPG LED
Luminous flux	1920lm+10% / 3840lm+10%
CCT	3000K, 4000K, 6000K
CRI	80+
Beam angle	5°, 8°, 12°, 24°, 36°, 60°, 10*30°
Dimension	500*65*55 mm / 1000*65*55 (L x W x H)
Cut out	/
Working Temp	-20 ~ +50
Life Time	50,000 Hrs
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V/ DC24V (AC100~240V version optional)
Insulation class	Class III
Cable	2 PCS rubber cable 20CM cables
Driver	Low voltage constant current output, excluding the transformer
Control	Stand alone
Construction Data	
IP rating	IP68 Waterproof
IK rating	IK04 for wall washer
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Glass
Glass	Tempered Glass. T=3mm
Loading capacity	220kgs / 2000kgs
Cable Gland	PG9 IP68
Gasket	PMQ silicone gasket seal
Accessories	
Bracket	Aluminium bracket for wall washer

Illumination Picture (10x30°)

