

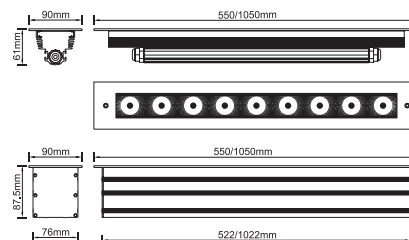



# Wall Washer

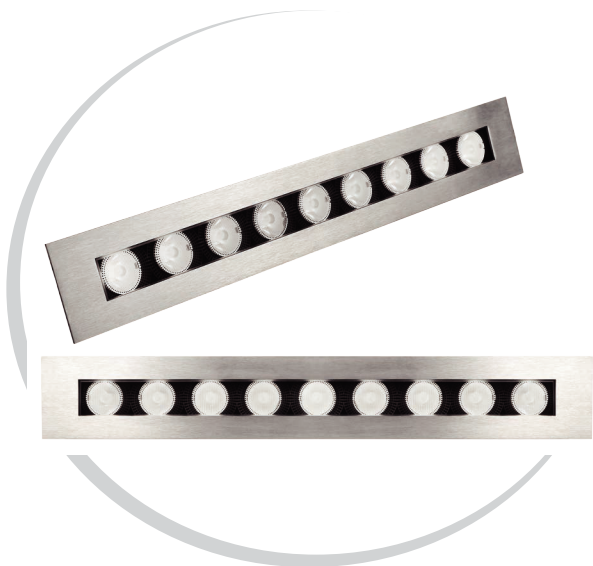

Light Distribution Curve (3000K, 10x30°)

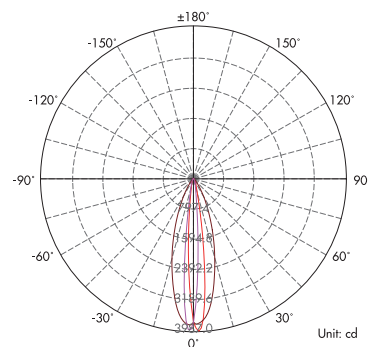

Lux distance Curve (3000K, 10x30°)

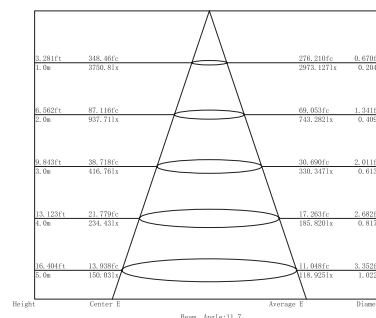

Illumination Picture ( 10x30°)



## Parameter

| General Data         |                                                                |
|----------------------|----------------------------------------------------------------|
| Item No.             | 48W: WLW1010 / 98W: WLW1040                                    |
| Power                | 48 Watts / 96 Watts                                            |
| LED type             | 9 PCS / 18 PCS CREE XPG LED                                    |
| Luminous flux        | 1920lm+10% / 3840lm+10%                                        |
| CCT                  | 2700K, 3000K, 4000K, 6000K, R/G/Y/B                            |
| CRI                  | 80+                                                            |
| Beam angle           | 5°, 8°, 12°, 24°, 36°, 60°, 10°30°                             |
| Dimension            | 550*90*61 mm / 1050*90*61 mm (L x W x H)                       |
| Cut out              | /                                                              |
| Working Temp         | -20 ~ +50                                                      |
| Life Time            | 50,000 Hrs                                                     |
| Certifications       | CE, RoHS                                                       |
| Electrical Data      |                                                                |
| Input voltage        | DC12V / DC24V (AC100~240V version optional)                    |
| Insulation class     | Class III                                                      |
| Cable                | 2 PCS rubber cable 20CM cables                                 |
| Driver               | Low voltage constant current output, excluding the transformer |
| Control              | Stand alone                                                    |
| Construction Data    |                                                                |
| IP rating            | IP68 Waterproof                                                |
| IK rating            | IK08                                                           |
| Housing              | Solid Passivated (Anodizing) Aluminum CNC machined             |
| Protection finishing | 20~25µm thickness anodized film for housing. Dark grey         |
| Trim                 | stainless steel 316                                            |
| Glass                | Tempered Glass. T=8mm                                          |
| Loading capacity     | 2000kgs                                                        |
| Cable Gland          | PG9 IP68                                                       |
| Gasket               | PMQ silicone gasket seal                                       |
| Accessories          |                                                                |
| Mounting sleeve      | Passivated (Anodizing) Aluminum. Dark grey                     |